

Better Safety, Better Life Challenge, Innovation

Human Beings, Environment and
Technology in Harmony

SenKo Co.Ltd.

SENKO



CEO Message

Though our country, Korea has an excellent competitiveness based on the technology even in the global endless competition days, the dependence on the advanced countries is as high as what it could be said to be technically governed in the gas sensor and gas safety equipment industry.

The gas sensor technology which could create the high additional value grafting with another industries, is one of the prospective technology which are growing very fast, as the environment and safety are being highly concerned.

Senko Co., Ltd. had developed sensors of the carbon monoxide, hydrogen sulfide by our own technology, starting the oxygen sensor, We had also developed to produce the gas safety equipment and its system such as the portable gas detector in the industrial field. We have been doing our best to localize the Korean domestic market which dominated by foreign countries' products as well as to develop the overseas market.



We will do our every possible efforts to be together wherever with our customer and surely stand based on the venture enterprise spirit in the industrial safety gas equipment area which the domestic enterprise never concerned, We are trying to develop the more efficient, convenient products for the customers, using the new technology as well as the conventional gas safety equipment.

We will establish the strategic partnership with the excellent institute/enterprise who have the technical competitiveness in another industries We will be born again to focus to develop the new product of the high additional value technically fused through the co-research based on this partnership.

Being one family based on the mutual trust to become the world wide company, we will found the business culture which all staffs could do our best. We promise to show our customers our efforts to do our best for the customer satisfaction. Please watch us with the friendly warm view. Thanks.

SENKO C.E.O **HA SEUNG CHUL**



Overview




Contents

- 5 Portable Single Gas Detector (SP2nd)
- 6 Portable Multi Gas Detector (SP12C7)
- 7 Charger (SP-Charger 201)
- 8 Sampling Pump (SP-Pump 101)
- 9 Portable Gas Leak Detector (SP secure)
- 10 Fixed Gas Detector (SI-100)
- 11 Fixed Gas Detector (SI-100C)
- 12 Multi Channel Gas Monitor for Fixed Gas Detectors (SI-100IM)
- 13 Special Receiver For Fixed Gas Detector (SI-100IS)
- 14 Gas Leak Detector (SI-100D)
- 15 Receiver For Fixed Gas Leak Detector (SI-100I)
- 16 Pressure Notification Receiver Device (SI-100IP)
- 17 SI-100 Wireless
- 18 Gas Sensor
- 19 Gas Sensor, SI-100 & SI-100C Specification
- 20 Gas Sensor Module (SM16X1)
- 21 Breath CO Monitor (BMC-2000)
- 22 Certificates
- 23 Monitoring System Configuration

Portable Single Gas Detector SP2nd

Explication and Features

SP2nd is an economical gas detector that can be operated continuously for two years without replacement of gas sensor to protect workers from the disasters caused by the oxygen deficiency or toxic gas poisoning. easure one gas continuously and display its concentration and raise an alarm when a risk occurs.

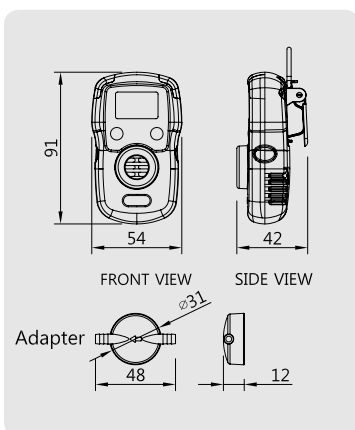

- Rubber material case for the shock protection
- The excellent water proof/dust proof structure
- High performance audible, visual, vibration alarm
- Setting 1st, 2nd alarm
- Automatic checking of the sensor trouble
- Data logging
- Disposable type (Under development)

Applications

Steelworks, Petrochemical plant, Shipbuilding yard, Sewage treatment plant, Mine, Power supply works, Hermetically sealed area (manhole, tank)




Specification

Model	SP2217	SP2227	SP2257	SP2277	SP2297	SP22N7
Measuring gas	O ₂	CO	SO ₂	H ₂	H ₂ S	NH ₃
Measuring type	Diffusion Type or Sampling type with the SP-PUMP 101 option					
Measuring method	Electrochemical cell					
Measuring range	0~30%vol	0~500ppm	0~20ppm	0~1000ppm	0~100ppm	0~100ppm
Sensor life time	< 2years	> 2year	> 2year	> 2year	> 2year	> 2year
Response time	<15sec/90% scale	<30sec/90% scale	<35sec/90% scale	<75sec/90% scale	<30sec/90% scale	<60sec/90% scale
Accuracy	±3%/Full scale					
Resolution	0.1%vol	1ppm	1ppm	Within 5ppm	1ppm	1ppm
Parameter Control	Front 2 switch(calibration, maintenance, alarm setting)					
Operation mode display	Visual : Digital LCD display, Trouble RedLED Audible : buzzer(90dB @ 10cm)					
Measuring value display	LCD Display(3-digit)					
Alarm display	"Visual : alarm & status icon, Trouble RedLED Audible : buzzer"					
Alarm level set	Programmable within detection range					
Data Log	Event Log : 20 Data					
Mounting type	Belt Clip					
Program set mode	Alarm value(1,2 alarm) time Set Calibration density setting					
Operating temperature	-20℃ ~50℃					
Operating humidity	5% to 95% RH(Non-condensing)					
Operating power	CR2 Lithium Battery 3V					
Battery life time	CR2 Battery(3.0v) : 1.2year, 1/2AA Battery(3.6V) : 1.9year. At 8hours use of a day					
Material	PC / TPE					
LCD size	27(W) × 17.5(H) mm					
Dimensions	54(W) × 91(H) × 42(D) mm					
Weight	120g (Including Battery)					
Approval	Ex ia IIC T4 IP67 (KGS, ATEX)					

Portable Multi Gas Detector SP12C7

Explication and Features

SP12C7 is an united gas detector measuring four (4) major gases, which result the most of the industrial accidents, to protect workers from the disasters caused by the oxygen deficiency, toxic gas poisoning and gas explosion. Measure continuously four (4) gases (O₂, CO, H₂S and Combustible Gas(CH₄)) and display their concentrations and raise an alarm when the risk occurs.

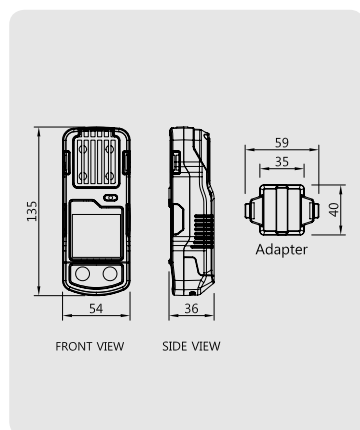

- Simultaneously check 4 different gases (methane, oxygen, carbon monoxide, hydrogen sulfide)
- Explosive proof structure for the safety
- Rubber material case for the shock protection
- External pump and probe installation
- Automatic light on when alarming
- Both rechargeable battery and alkaline battery are compatible
- The excellent water proof/dust proof structure
- Data logging (Under development)

Applications

Steelworks, Petrochemical plant, Shipbuilding yard, Sewage treatment plant, Mine, Power supply works, Hermetically sealed area (manhole, tank)




Specification

Model	SP12C7			
Measuring gas	CH ₄	O ₂	CO	H ₂ S
Measuring type	External Pump or Diffusion Type			
Measuring method	Catalytic	Electrochemical cell	Electrochemical cell	Electrochemical cell
Measuring range	0~100%LEL	0~30%VOL	0~500ppm	0~100ppm
Sensor life time	> 2years	< 2year	> 2year	> 2year
Response time	<15sec/90% scale	<15sec/90% scale	<30sec/90% scale	<30sec/90% scale
Accuracy	±3%/Full scale			
Resolution	1%LEL	0.1%VOL	1PPM	1PPM
Parameter Control	Front 2 switch(calibration, maintenance, alarm setting)			
Operation mode display	Digital LCD display, LCD Backlight, Indicator LED			
Measuring value display	Digital LCD Display			
Alarm display	Visual : LCD alarm display, LCD Backlight, Indicator LED Audible : buzzer(90dB @ 10cm)			
Alarm level set	Programmable within detection range			
Sampling method	Diffusion Type or Sampling type with the SP-Pump101 option			
Flow rate	External Pump : 0.5 Liter / min			
Mounting type	Belt Clip			
Program set mode	Alarm value(1,2 alarm)		Alarm value(1,2,TWA, STEL alarm)	
Operating temperature	Calibration Gas concentration Use sensor select Password Setting			
Operating humidity	-20℃ ~55℃			
Battery power	5 to 95% RH(Non-condensing)			
Battery life time	NI-MH Battery-2EA or Alkaline Battery-2EA			
Material	500~1,000 time Rechargeable			
LCD size	PC / TPE			
Dimensions	38(W) × 35(H) mm			
Weight	54(W) × 135(H) × 36(D)mm			
Approval	240g			
	Ex iad IIC T4 IP67 (KGS)			

Charger SP-Charger201

Explication and Features

SP- charger 201 is provided with SP12C7 as a basic package



- The handy stationary charger
- With one electric sources, several chargers can be used simultaneously
- Electric source and charging status LED




Instruction Of Use



Sampling Pump SP-Pump101

Explication and Features

Sampling pump is designed to be used by connecting to SP12C7 and SP2nd model. This can be used to check if there is gas leakage when measure the gas underground manhole.

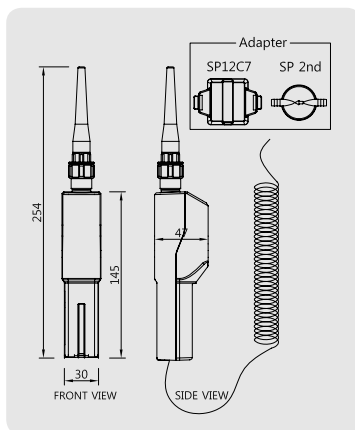

- Simple structure to install locking
- Excellently durable industrial pump installed
- Automatic checking of chocking

Applications

Steelworks, Petrochemical plant, Shipbuilding yard, Sewage treatment plant, Mine, Power supply works, Hermetically sealed area (manhole, tank)



Instruction Of Use

Specification


Model	SP-Pump101
Flow rate	Minimum 300cc/min
Alarm display	Low flow alarm / Low battery alarm (Red LED)
Operating temperature	-20℃~50℃
Operating humidity	5% to 99% RH(Non-condensing)
Battery power	1.5V AA size Alkaline battery 1EA
Battery life time	More than 10 hours
Dimensions	30(W) × 254(H) × 47(D) mm
Weight	200g (Battery Including)



Portable Gas Leak Detector SP secure

Explication and Features

SP secure is designed to be suitable for leak detection of any gas piping and valves by equipping a built-in sampling pump. Since the measured gas concentration is displayed in digital number, accurate measurement is possible.

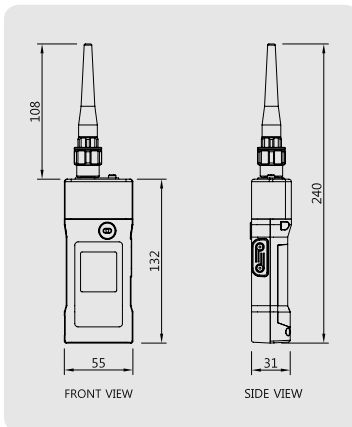

- Sampling pump built in structure
- The digital concentration display
- Detector for the gas leakage
- Both rechargeable battery and alkaline battery are compatible
- Adopt the sensor which detect the low concentrated
- Rechargeable battery is compatible with
- Data logging (Under development)

Applications

Steelworks, Petrochemical plant, Shipbuilding yard, Sewage treatment plant, Mine, Power supply works, Hermetically sealed area (manhole, tank)



Specification


Model	SP Secure			
Measuring gas	LNG/LPG, Combustible Gas	H ₂	Xylene	
Measuring type	Auto Sampling type			
Measuring method	Catalytic	Catalytic	Electrochemical cell	IR
Measuring range	0~100%LEL	0~100%LEL	0~1000ppm	0~100%LEL
Sensor life time	> 2years	> 2year	> 2year	> 2year
Response time	<10sec/90% scale	<10sec/90% scale	<75sec/90% scale	<30sec/90% scale
Operation time	About 12 hours			
Accuracy	±3%/Full scale			
Resolution	1%LEL	1%LEL	Within 5ppm	1%LEL
Parameter Control	Right Side switch(calibration, maintenance, alarm setting)			
Operation mode display	Visual : alarm & status icon, Trouble RedLED Audible : buzzer(90dB @ 10cm)			
Measuring value display	LCD Display(3-digit)			
Alarm display	Visual : alarm & status icon Audible : buzzer			
Alarm level set	Programmable within detection range			
Sampling method	Internal sampling pump			
Flow rate	0.5 liter/min			
Program set mode	Alarm value(1,2 alarm)			
Operating temperature	-20℃~50℃			
Operating humidity	10 to 95% RH(Non-condensing)			
Battery power	Rechargeable NI-MH or AA Alkaline battery 3ea			
Battery life time	More than 12 hours			
Material	Poly carbonate			
LCD size	32(W) × 40(H) mm			
Dimensions	55(W) × 240(H) × 31(D) mm			
Weight	Standard type : 260g (Battery Including)			
Approval	Ex d ia IIB T3 (KGS)			

Fixed Gas Detector

SI-100

Explication and Features

SI-100 is a fixed gas detector installed in a place where potential gas hazard exists to measure oxygen, toxic gas and combustible gas. It shows not only the concentration of gas but also diagnostic result of the unit itself through the LCD display and can be connected to the controller with a standard 4-20mA analog output communication or RS-485 digital communication.

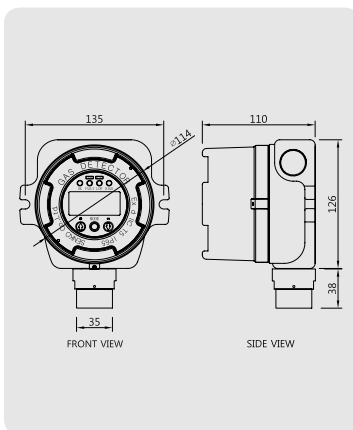

- SI-100 measures the concentration of the flammable gas, toxic gas, oxygen and display with LCD
- Easy magnetic bar operation
- Big digital LCD installed with a blue backlight
- Explosive proof structure
- Water/dust proof structure
- Simple gas calibration

Applications

Steelworks, Petrochemical plant, Shipbuilding yard, Sewage treatment plant, Mine, Power supply works, Hermetically sealed area (manhole, tank)




Specification

※ Varicus gas sensors can be applied

Model	SI-100			
Measuring gas	Combustible Gas		Toxic Gas	Oxygen
Measuring type	Diffusion Type			
Measuring method	Catalytic	IR	Electrochemical cell	Galvanic
Measuring range	0~100%LEL	0~100%LEL	Refer to the list (P.19)	0~30%VOL
Sensor life time	> 2years	> 2years	> 2years	< 2years
Response time	<15sec/90% scale	<30sec/90% scale	Refer to the list (P.19)	<15sec/90%scale
Accuracy	±3%/Full scale			
Resolution	1%LEL	1%LEL	Refer to the list (P.19)	0.1%VOL
Parameter Control	Front 3 magnetic switch(calibration, maintenance, alarm setting)			
Operation mode display	Digital LCD display, LCD Backlight, 4 Indicator LED			
Measuring value display	Digital LCD Display(4-digit)			
Alarm display	Visual : LCD alarm display, LCD Backlight, Indicator LED			
Alarm output signal	Relay contact(Max 30Vdc, 5A) when Alarm occurred			
Alarm level set	Programmable within dectection range			
Output signal	Analog : 4-20mA, Digital : RS-485(Option)			
PC interace	RS_485(Option)			
Cable/Distance	Power + Signal cable : 3-wire 1.5sq(AWG16)/2,500m max RS-485 data communication cable : 1 pair(UL2919 RS-485)/1,200m max			
Conduit connection	NPT 3/4" (2way)			
Mounting type	Wall mount			
Program set mode	Alarm value(1,2,3 alarm)	Alarm time(instant&delay)1~30min	Alarm dead band	Relay output on/off
Operating temperature	-20℃~50℃			
Operating humidity	5% to 95% RH(Non-condensing)			
Operating power	10~30Vdc 600mA			
Material	Aluminium, Stainless steel(STS304)			
LCD size	55(W) × 30(H) mm			
Dimensions	135(W) × 164(H) × 110(D)mm			
Weight	1.9kg			
Approval	Ex d IIC T5 IP65 (IECEX)			

Explication and Features

SI-100C is a fixed gas detector installing in a place where potential gas hazard exists to measure oxygen, toxic gas and combustible gas without LCD display. It can be connected to the controller with a standard 4-20mA analog outputs.



- Explosive proof structure
- Water/dust proof structure
- 4-20mA Analog outputs
- Built-in Calibration Mode

Applications

Steelworks, Petrochemical plant, Shipbuilding yard, Sewage treatment plant, Mine, Power supply works, Hermetically sealed area (manhole, tank)



Specification

※ Varicus gas sensors can be applied


Model	SI-100C			
Measuring gas	Combustible Gas		Toxic Gas	Oxygen
Measuring type	Diffusion Type			
Measuring method	Catalytic	IR	Electrochemical cell	Galvanic
Measuring range	0~100%LEL	0~100%LEL	Refer to the list(P.19)	0~30% VOL
Sensor life time	> 2years	> 2years	> 2years	< 2years
Response time	<15sec/90% scale	<30sec/90% scale	Refer to the list(P.19)	<15sec/90%scale
Accuracy	±3%/Full scale			
Resolution	1%LEL	1%LEL	Refer to the list (P.19)	0.1%VOL
Parameter Control	Switch(calibration), Admin Console(maintenance, OPTION)			
Operation mode display	2-LED(Operating and Zero Cal, Span Cal. LED)			
Output signal	4-20mA DC(3wire)			
Cable/Distance	Signal cable : 3-wire > / 1.5sq(AWG16)/2,500m max			
Conduit connection	NPT 3/4" (2way)			
Mounting type	Wall mount			
Setting	1 Switch Interface(Calibration), Console set available(Option)			
Remote Set	via Console (Zero Calibration, Span Calibration, Calibration Gas Concentration Set, Factory default, 4-20mA Calibration, Range Set, Data Logging)			
Operating temperature	-20℃~50℃			
Operating humidity	5% to 95% RH(Non-condensing)			
Operating power	7V to 40V INPUT DC (12V or 24V DC 60mA normal)			
Material	Aluminium, Stainless steel(STS304)			
Dimensions	102(W) × 137(H) × 87(D)mm			
Weight	1.0 kg			
Option	Console			
Approval	Ex d IIC T5 IP65 (IECEx)			

Multi Channel Gas Monitor for Fixed Gas Detectors

SI-100IM

Features

SI-100I-M consists of a Main Alarm unit and Alarm display units. From the one main unit, the alarm display unit can be constructed from 1 to 10 units. SI-100I-M is designed as DIN type, so the device can be manufactured in the wall mount panel type, Standalone type, or 19" Rack type according to a user's preference.

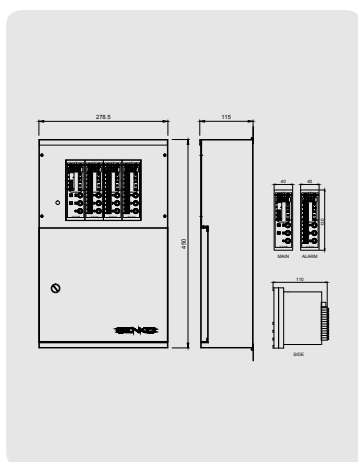

- Sophisticated design and simple structure
- 4Digit F.N.D Digital Display
- 40 LED Bar Graph (% , PPM, LEL unit display)
- Fault, 1st, 2nd, 3rd Alarm Icon
- 40 Red Arrow LED Graph(<) Display
- Easy zero and standard gas calibration
- Self Diagnosis mode
- Display the frequency of calibration
- Back-up Battery installed
- Data Recovery function

Applications

Steelworks, petrochemical, refining, shipbuilding, wastewater treatment plants and septic tank, LPG tank facilities, LNG gas plant



Specification


	Main Alarm Unit	Alarm Display Unit
Model No	SI-100IM	SI-100IA
Measuring Range	0-30V FND Digital Display	0.000 to 9999 Digital User Setting
Measuring Display	"4Digit FND Digital Display 18 LED Bar Graph, Battery, B/Z Stop (V Unit Display)"	"4Digit F.N.D Digital Display 40 LED Bar Graph (% , PPM, LEL Unit Display)"
Alarm Display	"Fault, 1st, 2nd, 3rd Alarm ICON AU01~AU10 (Alarm Unit, indicating in order)"	"Fault, 1st, 2nd, 3rd Alarm ICON 40 Red Arrow LED Graph(<)"
Alarm Sound	Buzzer 92dB	
Input Signal		4-20mA Full Scale
Output Signal	1st, 2nd, 3rd Relay Dry Contact, 12V.DC	Fault, 1st, 2nd, 3rd Relay Dry Contact, 4-20mA, 12V.DC
Accuracy		"FND Digital $\pm 1\%$ Full Scale or 1Digit (Whichever is greater) LED Bar $\pm 1\%$ Full Scale or 1Digit (Whichever is greater)
Alarm Set	depend on configuration of SI-100IA	"1st, 2nd, 3rd Alarm Setting 40 Red Arrow LED Graph(<) Setting"
Alarm Reset	Manual Total Reset & HMI	Manual Local Reset
Self Test	Battery Test Switch (AC/DC)	Test Switch (0~Max Range 10sec)
Operating in/out	RS-485 Modbus (SI-100ICU Option)	
Scan Time	10ms	10ms
Back-Up Battery	Ni-Cd Battery 18V 600mA (3, 6Channel)	
Operating Power	110/220V.AC 50/60Hz (or 24V.DC)	
Operating Humidity	-20°C~40 °C, 95%RH	-20°C~40 °C, 95%RH
Dimensions	Main Channel Card : 40(W) x 130(H) x 104(D)mm Wall Mount Panel 3CH : 278.5(W) x 450(H) x 115(D)mm Wall Mount Panel 6CH : 398.5(W) x 450(H) x 115(D)mm	Alarm Channel Card : 40(W) x 130(H) x 104(D)
Weight	3CH : 7.3kg, 6CH : 10kg	

Features

- Sophisticated design and simple structure
- Display using the Bar-Graph depend on alarm steps, (1st, 2nd, 3rd Alarm)
- 3 Colored LED and F.N.D gas concentration display
- Easy zero calibration and built-in calibration mode
- Self test mode
- Display the number of calibrations
- RS-485 (Option)

**Applications**

Steelworks, Sewage treatment plant, Petrochemical plant, Mine, Shipbuilding yard

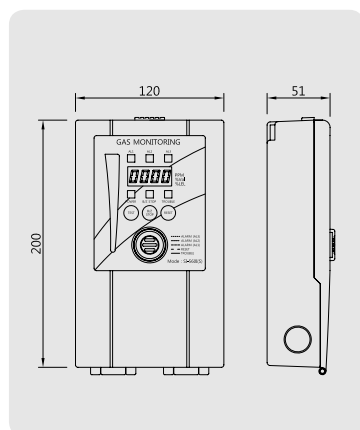
**Specification**

Model	SI-100IS
Measuring range	Programmable within detection range
Display	30-Bar graph, 3 Alarm LED, 3 Status LED, 7-Segment(4Digit)
Sound	buzzer(Alarm1,2,3, Reset, Fault), 80dB
Operation mode display	3 Alarm LED, 3 Status LED
Measuring value display	30-Bar graph, 7-Segment(4Digit)
Alarm level set	Alarm1,2,3 Programmable within detection range
Alarm signal output	Alarm 1,2,3 - 12V.DC, Dry contact (com, no, nc), comm 12V.DC, Dry contact(com, no, nc)
Input Signal	4/20mA signal
Cable/Distance	CVVSB1.5SQ × 3Wire (Power + signal) / 2,500m max
Mounting type	Wall mount
Program set mode	ALARM1,2,3, Range, 4-20mA Calibration etc.
Operating temperature	-20℃ ~ +50℃
Operating humidity	5%~95%RH(non-condensing)
Operating power	100~240V INPUT AC (50/60Hz), <0.24A
Material	ABS AF308
Dimensions	120(W) × 200(H) × 51(D)
Weight	0.5kg
Option	RS-485 Module

Gas Leak Detector SI-100D

Explication and Features

SI-100D SET is a combustible gas detector that consists of a sensing unit and a receiver. This is used to detect gas leaks in the pipe or valve. SI-100D SET is a low-priced entry-level products.

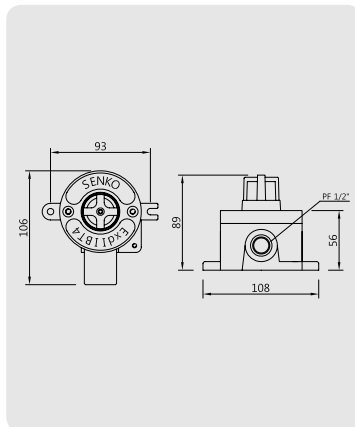

Detector SI-100D

- Explosion proof structure
- Long distance communication with 4~20mA analog output
- Convenient installation
- Simple structure, reasonable price

Applications

Steelworks, Sewage treatment plant, Petrochemical plant, Mine, Shipbuilding yard



Specification


Model	SI-100D
Measuring gas	LNG/LPG(methane/propane)
Measuring type	Diffusion type
Measuring method	Catalytic
Measuring range	0~100%LEL
Sensor life time	> 2years
Response time	<10sec/90%scale
Accuracy	±3%/Full scale
Output signal	4-20mA DC
Cable/Distance	CVVSB1.5SQ × 3Wire (Power + signal) / 2,500m max
Conduit connection	NPT 1/2"
Mounting type	Wall mount
Operating temperature	-20℃~+50℃
Operating humidity	0%~95% RH(non-condensing)
Operating power	24V DC +/- 20%, <90mAh
Material	Aluminium
Dimensions	93(W) × 106(H) × 89(D)mm
Weight	0.6kg
Approval	Ex d IIB T4/14-KB2BO-0422 (KTL)

Receiver For Fixed Gas Leak Detector

SI-100I

Explication and Features

SI-100D SET is a combustible gas detector that consists of a sensing unit and a receiver. This is used to detect gas leaks in the pipe or valve. SI-100D SET is a low-priced entry-level products.

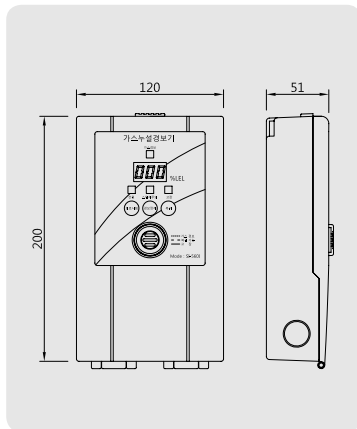

Receiver SI-100I

- Simple structure, reasonable price
- Sophisticated design and simple structure
- 3 Colored LED and F.N.D gas concentration display
- Easy zero calibration and built-in calibration mode
- Self test mode
- Displays the number of calibration and sensor efficiency

Applications

Steelworks, Sewage treatment plant, Petrochemical plant, Mine, Shipbuilding yard



Specification


Model	SI-100I
Measuring range	0~100%LEL
Display	1 Alarm LED, 3 Status LED, 7-Segment(3Digit)
Sound	buzzer(Alarm, Reset, Fault), 80dB
Operation mode display	1 Alarm LED, 3 Status LED
Measuring value display	7-Segment(3Digit)
Alarm level set	15%LEL
Alarm signal output	12V.DC, Dry contact (com, no, nc)
Input Signal	4/20mA signal
Reset signal	Reset switch
Cable/Distance	CVVSB1.5SQ x 3Wire (Power + signal) / 2,500m max
Mounting type	Wall mount
Operating temperature	-20℃ ~ +50℃
Operating humidity	5%~95%RH(non-condensing)
Operating power	100~240V INPUT AC (50/60Hz), <0.24A
Material	ABS AF308
Dimensions	120(W) × 200(H) × 51(D)
Weight	0.48kg

Pressure Notification Receiver Device

SI-100IP

Features

- Sophisticated design and simple structure
- Alarm depend on pressure fluctuations
- Low pressure, High pressure Alarm
- Alarm function for returning to normal pressure
- Self test mode

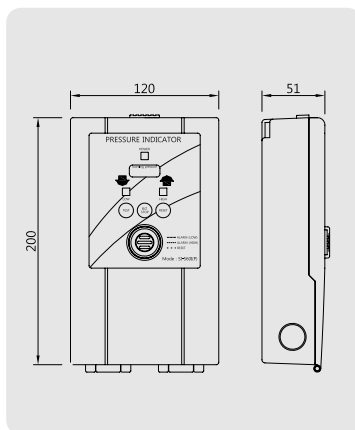

Applications

Steelworks, Sewage treatment plant,
Petrochemical plant, Mine, Shipbuilding yard



Specification


Model	SI-100IP
Detecting Pressure	0 ~ 500 mmH2O - 1.2kg, 2.0 ~ 1000 mmH2O, 3.0 ~ 5000 mmH2O, 4.0 ~ 1Kgf/cm ² (Max 10K)
Display	2LED
Alarm Setting Value	Low , High Alarm
Alarm	LED, Buzzer
Input Signal	Dry contact (Low, High)
Output Signal	Dry contact (Low, High) - com, no, nc
Power	100~240V.AC 50/60Hz (Consumption : 200mA)
Operating temp. & Humi.	-20℃~+50℃ / 5%~95% RH(non-condensing)
Dimensions	120(W) × 200(H) × 51(D)mm



SI-100 Wireless

Explication and Features

SL-101 is a fixed gas detector installed in a place where potential gas hazard exists to measure oxygen, toxic gas and combustible gas. It hows not only the concentration of gas but also iagnostic result of the unit itself through the LCD display and can be connected to the controller with RF commucation wirelessly.

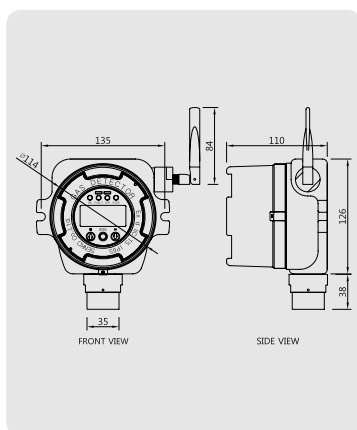

- Easy Installation/removal because no wiring works are required
- Economic system which doesn't require any wiring construction
- Water/Dust proof structure
- Same functions with Fixed Gas Detector working with wiring electrical power source
- Tracking is possible with its own address- Maintenance and Replacement are simple

Applications

Steelworks, Petrochemical plant, Shipbuilding yard, Sewage treatment plant, Mine, Power supply works, Hermetically sealed area (manhole, tank)

Specification

※ Varicus gas sensors can be applied

Model	SI-100 Wireless			
Measuring gas	Combustible Gas	Toxic Gas	Oxygen	
Measuring type	Diffusion Type			
Measuring method	Catalytic	IR	Electrochemical cell	Galvanic
Measuring range	0~100%LEL	0~100%LEL	Refer to the list (P.18)	0~30%Vol
Sensor life time	> 2years	> 2years	> 2years	< 2years
Response time	<15sec/90% scale	<30sec/90% scale	Refer to the list (P.18)	<15sec/90% scale
Accuracy	±3%/Full scale			
Resolution	1%LEL	1%LEL	Refer to the list (P.18)	0.1%Vol
Parameter Control	Front switch(calibration, maintenance, alarm setting)			
Operation mode display	4-LED(Power, 2-stage alarm, 1-trouble)			
Measuring value display	LCD Display(4-digit), Built in back light			
Alarm display	Visual : 2-stage alarm, Trouble LED			
Alarm output signal	2-stage alarm, Trouble AC250V 5A relay contact(SPDT)			
Alarm level set	Programmable within dection range			
Alarm signal output	250V 1A/3-SPST relay contact(2-stage alarm, 1-trouble)			
Frequency	433MHz, 914MHz, 2.45Ghz			
Mounting type	Wall mount			
Program set mode	Alarm value(1,2 alarm) 4-20mA Calibration			
Operating temperature	-20℃~50℃			
Operating humidity	5% to 99% RH(Non-condensing)			
Battery power	Battery : 3.6V 1.46A			
Battery life time	6~12Month			
Material	Aluminium, Stainless steel(STS304)			
LCD size	55(W) × 30(H) mm			
Dimensions	150(W) × 165(H) × 110(D)mm			
Weight	1.9kg			
Approval	Ex d IIC T5 IP65 (KTL)			

GAS SENSOR



Oxygen sensor SS1118 (0~100%)



- With high concentrated oxygen measuring sensor, only for the Oxygen generator and medical sensor
- Measure the oxygen's pressure in the air

Hydrogen sulfide sensor SS2198



- Suitable to monitor the petrochemical, oil refining, waste water treatment, drain water treatment, manhole, mining

Oxygen sensor SS2118 (0~30%)



- As the measuring sensor of the oxygen in the air, suitable for the portable equipment and industrial equipment
- Excellent accuracy and response time

IR (Infrared) Sensor



- Gas measuring Sensor only for the flammable gas and carbon dioxide, nitrogen dioxide
- The Infrared sensor which has Very fast response and excellent accuracy can ensure the flammable gas in the nonoxygen space

Carbon monoxide sensor SS2128



- Fire monitoring application for the portable equipment, industrial safety equipment, boiler room, parking place
- Excellent stability of the output signal and little affected by other gases

Hydrogen sensor SS2178



- Suitable to monitor the power plant, hydrogen fuel battery, hydrogen tank, hydrogen leakage and processes
- Minimize the interference on the hydrogen sulfide

Specification

Model	SS1118	SS2118	SS2128	SS2178	SS2198	IR sensor
Detecting Gas	Oxygen	Oxygen	Carbon monoxide	Hydrogen	Hydrogen sulfide	Hydro Carbon, CO ₂ etc
Nominal Range	0~100%	0~30%	0~2,000ppm	0~1,000ppm	0~100ppm	0~5%Vol
Maximum Overload	-	-	5,000ppm	2,000ppm	550ppm	0~100%
Expected operating Life(years)	< 2years	< 2years	> 2years	> 2years	> 2years	> 2years
Output Singnal	6.0± 1.0mV	90± 20μA@/20.9% Oxygen	70±20nA/ppm	15±10nA/ppm	700±200nA/ppm	0-2.8V DC
Resolution	0.1%	0.5%	0.5ppm typical	2ppm	0.1ppm typical	0.5%
Temperature Range	-20°C ~ +50°C					
Pressure Range	Atmospheric ±10%					
T90 Response Time	≤ 15 sec	≤ 15 sec	≤ 25 sec	≤ 30 sec	≤ 20 sec	≤ 30 sec
Relative Humidity Range			15~90% RH			0~90%RH
Typical Vaseline Range	-	-	≤±2ppm CO equivalent	0 to 30ppm	≤±2ppm H ₂ S equivalent	0 to 10ppm
Maximum Zero Shift (+20°C to +40°C)	-	-	-2 to 3ppm	-20ppm equivalent	0.2ppm equivalent	10ppm equivalent
Long Term Output Drift	Less than 5%/year	Less than 5%/year	Less than 5%/year	Less than 5%/year	Less than 5%/year	±1%FSDper month @20°C
Recommended LoadResistor	-	100Ω	10Ω	10Ω	10Ω	-
Bias Voltage	Not required	Not required	Not required	Not required	Not required	-
Repeatability	2% of signal	2% of signal	≤±2ppm CO equivalent	2% of signal	≤±2ppm CO equivalent	-
Output Linearity	Linear					
Weight	7g	18g	6g	6g	6g	15g
Positon Sensitivity	None					
Storage Life	6 month					
Recommended Storage Temperature	0~20°C					
Warranty Period	1 year	1 year	1 year	1 year	1 year	1 year

SI-100 Specification

※ It is available to order various sensors including below list.

Gas		Sensor	Range	A1	A2	Resolution
Oxygen	O ₂	Electrochemical	0~30%Vol	19.0%Vol	23.0%Vol	0.1%Vol
Carbon Monoxide	CO	Electrochemical	0~500ppm	30ppm	60ppm	1ppm
Sulfur Dioxide	SO ₂	Electrochemical	0~20ppm	2ppm	5ppm	0.1ppm
Hydrogen	H ₂	Catalytic	0~100%LEL	0~10%LEL	20%LEL	1%LEL
Hydrogen	H ₂	Electrochemical	0~1000ppm	100ppm	500ppm	within 5ppm
Hydrogen sulfide	H ₂ S	Electrochemical	0~100ppm	10ppm	15ppm	1ppm
Hydrogen sulfide	H ₂ S	PID	0~50ppm	10ppm	15ppm	0.1ppm
Combustible	-	Catalytic	0~100%LEL	10%LEL	20%LEL	1%LEL
Combustible	-	IR	0~100%LEL	10%LEL	20%LEL	1%LEL
Ammonia	NH ₃	Electrochemical	0~100ppm	25ppm	35ppm	1ppm
Acetylene	C ₂ H ₂	Catalytic	0~100%LEL	10%LEL	20%LEL	1%LEL
Ethanol	C ₂ H ₅ OH	Catalytic	0~100%LEL	10%LEL	20%LEL	1%LEL
Toluene	C ₆ H ₅ CH ₃	IR	0~100%LEL	10%LEL	20%LEL	1%LEL
Toluene	C ₆ H ₅ CH ₃	Catalytic	0~100%LEL	10%LEL	20%LEL	1%LEL
Acetic acid	CH ₃ COOH	Catalytic	0~100%LEL	10%LEL	20%LEL	1%LEL
Methane	CH ₄	IR	0~9999ppm	5000ppm	6000ppm	Within 20ppm
Methane	CH ₄	IR	0~100%LEL	10%LEL	20%LEL	1%LEL
Methane	CH ₄	IR	0~100%vol	5%vol	6%vol	1%vol
Chlorine	Cl ₂	Electrochemical	0~5ppm	0.5ppm	1.0ppm	0.1ppm
Chlorine	Cl ₂	Electrochemical	0~20ppm	0.5ppm	1.0ppm	0.1ppm
Carbon Dioxide	CO ₂	IR	0~2000ppm	1000ppm	1500ppm	Within 3ppm
Carbon Dioxide	CO ₂	IR	0~5000ppm	3000ppm	5000ppm	Within 3ppm
Carbon Dioxide	CO ₂	IR	0~5%Vol	0.5%Vol	3.0%Vol	0.1%Vol
Hydrogen Chloride	HCl	Electrochemical	0~10ppm	1ppm	2ppm	0.1ppm
VOC	VOC	PID	0~1000ppm	50ppm	100ppm	Within 3ppm
Xylene	C ₆ H ₄ (CH ₃) ₂	IR	0~100%LEL	10%LEL	20%LEL	1%LEL

SI-100C Specification

※ It is available to order various sensors including below list.


Gas	Sensor	Range	A1	A2	Resolution
Oxygen	O ₂	Electrochemical	0~30%Vol		
Carbon Monoxide	CO	Electrochemical	0~500ppm		
Hydrogen	H ₂	Catalytic	0~100%LEL		
Hydrogen	H ₂	Electrochemical	0~1000ppm		
Hydrogen sulfide	H ₂ S	Electrochemical	0~200ppm		
Combustible	-	Catalytic	0~100%LEL		
Ethylene Oxide	C ₂ H ₄ O	IR	0~100%LEL		
Methanol	CH ₃ OH	Catalytic	0~100%LEL		
Ammonia	NH ₃	Electrochemical	0~100ppm		

Refer to the alarm set points in the SI-100 Specification

Gas sensor module SM16X1

Explication and Features

Generally, the gas sensor could be divided as 4 kinds such as the electric chemical type, the semi-conductor type, the optic type, the catalytic. The application of each sensor type is quite different. It is important to adopt the proper gas sensor depend on the gas type, environmental factor in the using area, sensing range, resolving ability, cost, etc. Senko Co., Ltd is trying to provide the most proper gas sensor and modules depend on customers' requests, keeping lots of the technology development and Know How related with the gas sensor.

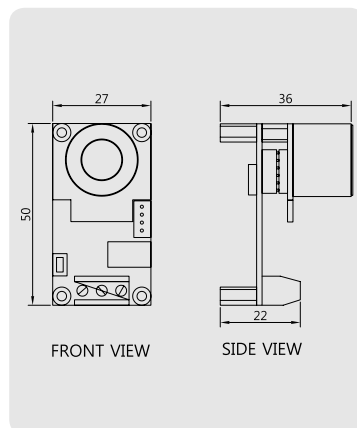

- The carbon dioxide sensor module sequenced with the air conditioner
- The smell sensor module for home appliance (TVOC sensor adopted)
- Hydrogen detecting module for the fuel battery
- Electric sensor transmitter only for the electric chemical sensor type
- Concentrated Oxygen Sensor Modules for the Oxygen Generator
- Concentrated Odor sensor module
- Module related with the electronic nose


Specification

Model	SM16X1						
Measuring gas	O ₂	O ₂	CO	H ₂ S	H ₂	H ₂	NH ₃
Measuring type	Diffusion Type						
Measuring method	Electrochemical	Electrochemical	Electrochemical	Electrochemical	Electrochemical	Catalytic combustion	Electrochemical
Measuring range	0~100%	0~30%	0~500ppm 0~1000ppm	0~100ppm	0~1000ppm	0~100%LEL	0~100ppm
Sensor life time	< 2years	< 2years	> 2years	> 2years	> 2years	> 2years	> 2years
Response time	T90 < 5 sec	T90 < 15 sec	T90 < 15 sec	T90 < 30 sec	T90 < 30 sec	T90 < 10 sec	T90 < 90 sec
Accuracy	±3%/Full scale						
Sensitivity	0.10%	0.10%	1ppm 3ppm	0.5ppm	5ppm	1%LEL	0.5ppm
Output signal	4-20mA						
Operating temperature	-10 ~ 50°C						
Operating humidity	15 ~ 90%RH						
Operating power	9 ~ 30VDC (Max 80mA @ 12VDC) (Galvanic, Electrochemical - 10~15mA, IR or Catalytic - 50mA)						
Dimensions	50(W) × 27(H) × 36(D)						
Weight	Module 26g						
Measuring gas	SO ₂	NO ₂	NO	CH ₄	CH ₄	CO ₂	
Measuring type	Diffusion Type						
Measuring method	Electrochemical	Electrochemical	Electrochemical	Catalytic combustion	IR	IR	
Measuring range	0~20ppm	0~20ppm	0~250ppm	0~100%LEL	0~100%vol 0~100%LEL (0~5%vol)	0~2000ppm 0~5000ppm	
Sensor life time	> 2years	> 2years	> 2years	> 2years	> 2years	> 2years	
Response time	T90 < 35 sec	T90 < 50 sec	T90 < 45 sec	T90 < 10 sec	T90 < 30 sec	T90 < 30 sec	
Accuracy	±3%/Full scale						
Sensitivity	0.1ppm	0.1ppm	1ppm	1%LEL	1%vol 1%LEL	3ppm 7ppm	
Output signal	4-20mA						
Operating temperature	-10 ~ 50°C						
Operating humidity	15 ~ 90%RH						
Operating power	9 ~ 30VDC (Max 80mA @ 12VDC) (Galvanic, Electrochemical - 10~15mA, IR or Catalytic - 50mA)						
Dimensions	50(W) × 27(H) × 36(D)						
Weight	Module 26g						

Breath CO Monitor BMC-2000

Explication and Features

BMC-2000 can be used in smoking cessation programs by healthcare professionals. And it also can be used as a noninvasive method to get %COHb in the patient's blood and to screen CO poisoned patients by medical man. The small size and light weight make the BMC-2000 ideal for hand held use. It is mainly used in smoking cessation clinics; it is used for instructional purposes to check on the client's progress and compliance.

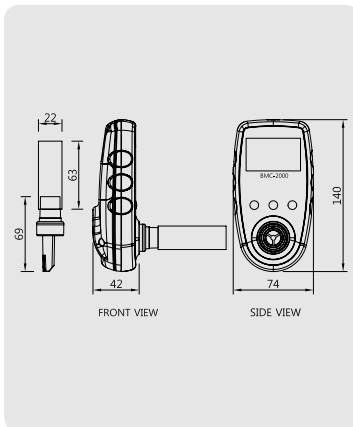

- Non-Invasive method to know how much carbon monoxide(CO) poisoned
- Indirect and simple instrument to measure carboxyhemoglobin(COHb)in blood
- Easy to discriminate smoker
- Easy to recognize the degree of CO poisoning (smoking habit)
- Two language (English, Korean) are provided
- CE certificate of European medical equipment
- Concentration of CO in breath and percentage of COHb in blood are displayed simultaneously
- Adult / Pregnant / Young mode are provided



Specification

Model	BMC-2000
Measuring gas	CO
Measuring type	Breath through the mouth
Measuring method	Electrochemical cell
Measuring range	0~100ppm, 0~500ppm
Sensor life time	2years
Countdown	15 seconds
Accuracy	±5%/Full scale or 1ppm
Sensor drift	1% / month
Hydrogen cross sensitivity	5~10% / Full scale
Resolution	1ppm
Parameter Control	Front 3 switch(calibration, maintenance, configuration setting)
Operation mode display	Visual : Graphic LCD Display, LED Indicator Audible : buzzer
Measuring value display	Graphic LCD Display
LED indicator	7 Steps (Green/Amber/Red)
Reset signal	Auto Power OFF
Mounting type	Pocket, Hand carry
User mode	Adult / Adolescent
Program set mode	Language(Korean, English), Age, Sound, Calibration
Operating temperature	0℃~40℃
Operating humidity	15 to 90% RH(Non-condensing)
Battery power	AA Size Alkaline battery 2ea
Battery life time	>1,000hour
Mouthpiece adapter	D type bacteria filter
Disposable mouthpiece	Diameter 22mm
Material	PC+ABS
LCD size	50(W) × 30(H) mm
Dimensions	140(W) × 42(H) × 74(D)mm
Weight	160g

Certificates



Business License



Factory Registration Certificate



Foreign Investment Enterprises



Certificate Of Registration



Certificate Of Green Technology



Safety Certificate (SP2nd)




Safety Certificate (SP12C7)



Safety Certificate (SPsecure)



Certificate Of Approval (SI-100)



Declaration Of Conformity (SP2nd)



Declaration Of Conformity (SP12C7)



CE Conformance Report (SPsecure)



ATEX Certificate



Certificate Of China



Certificate Of Russia (Gost-R)



Certificate Of Brazil



CB Test Certificate (SP2nd)



CB Test Certificate (SP12C7)



IECEx




CNEC




TR CU

Monitoring System Configuration


Configuration-1

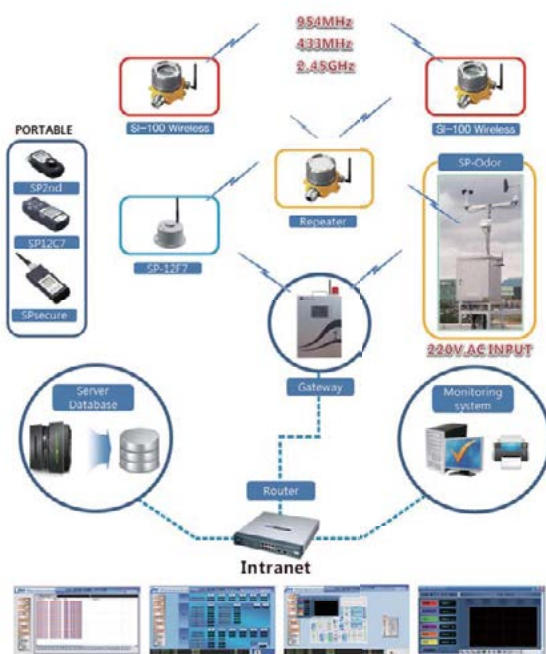


Configuration-2

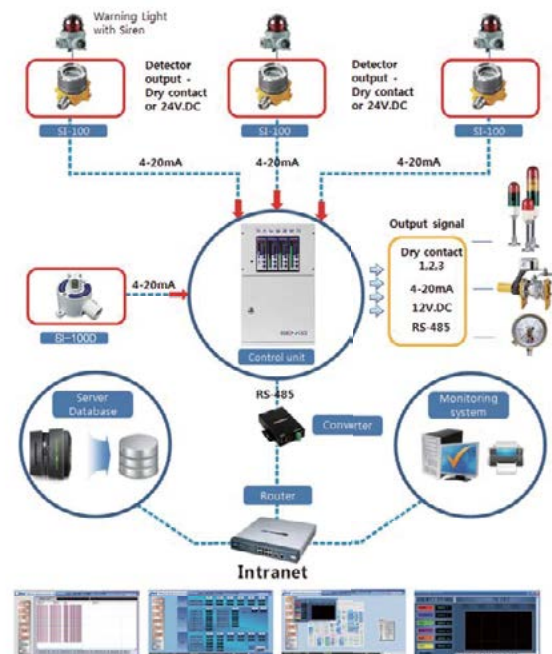

Configuration-3

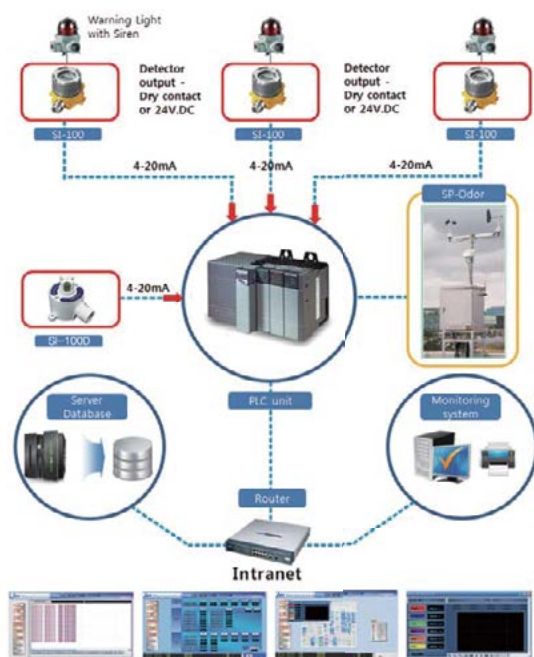

Configuration-4

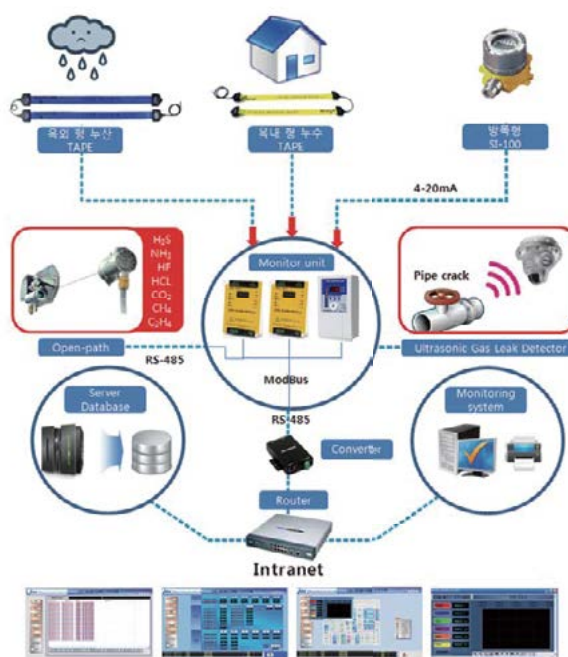



SENKO
SenKo Co., Ltd

73, Oesammi-ro 15beon-gil, Osan-si,
Gyeonggi-do, 447-230, South Korea
Tel. +82-31-492-0445
Fax. +82-31-492-0446
E-mail. senko@senko.co.kr
Web site. www.senko.co.kr